



SPECIFICATIONS

Current Rating: 3Amps
 Contact Resistance: 20m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 500V AC for 1 minute
 Temperature Range: -40°C to +105°C
 Terminal : Brass
 Material: PBT, UL94V-0


ORDER INFORMATION

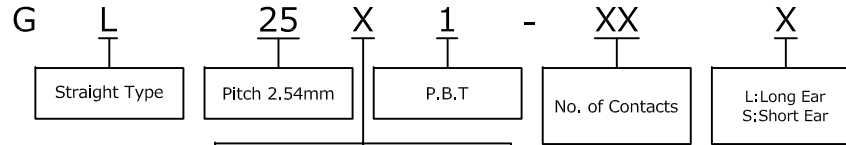





G0:Gold Flash	S0:Selective Flash
G1:Gold 3u"	S1:Selective 3u"
G2:Gold 5u"	S2:Selective 5u"
G3:Gold 10u"	S3:Selective 10u"
G4:Gold 15u"	S4:Selective 15u"
G5:Gold 30u"	S5:Selective 30u"



Short Ear



Long Ear

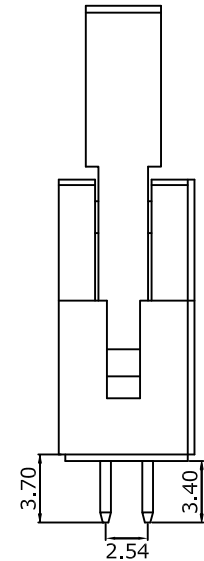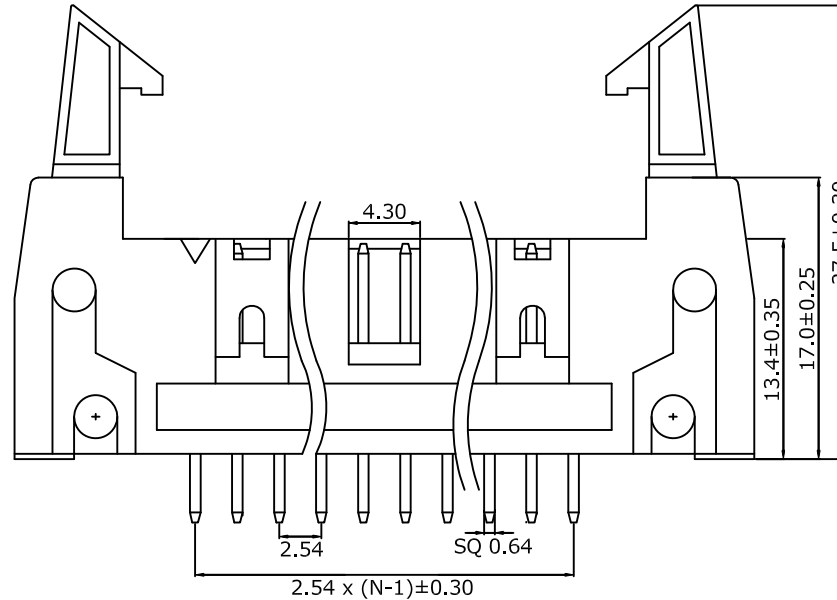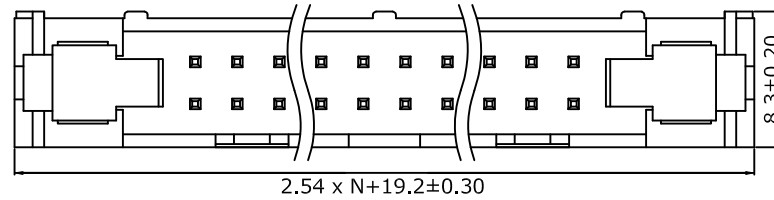

Recommended PCB Layout
 (PCB TOLERANCE±0.05)

M Morecrafts Technology
 TEL: +886-2-2966-1326
 FAX: +886-2-2966-1352
 www.morecrafts.com.tw

PART NO.	GL25X1-XXX	DRAWN	Andrew
DRAWING NO.	GL25X1-XXX	CHECKED	Claudia
DATE	2015/07/24	APPROVED	Brian

TITLE:	Ejector Header 2.54mm	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm
--------	-----------------------	------	----	-----------	-----------------------	-------	-----	------	----