


Specifications

Current Rating: 3A AC,DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Temperature Range: -40°C ~ +105°C


Material

Insulator: PBT, UL94V-0
 Contact: Copper Alloy


ORDER INFORMATION





G0:Gold Flash	S0:Selective Flash
G1:Gold 3u"	S1:Selective 3u"
G2:Gold 5u"	S2:Selective 5u"
G3:Gold 10u"	S3:Selective 10u"
G4:Gold 15u"	S4:Selective 15u"
G5:Gold 30u"	S5:Selective 30u"





Short Ear



Long Ear

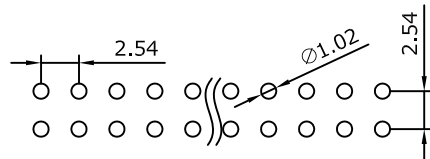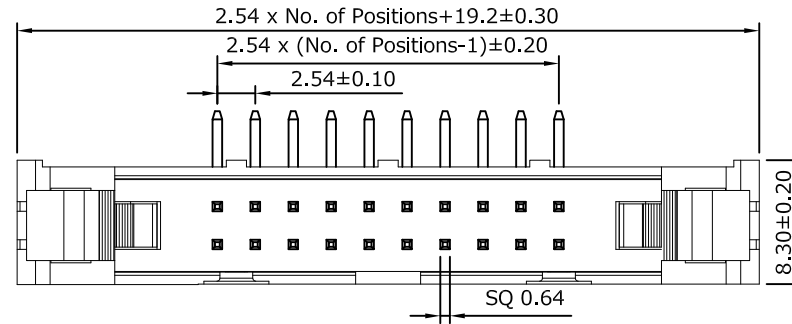

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

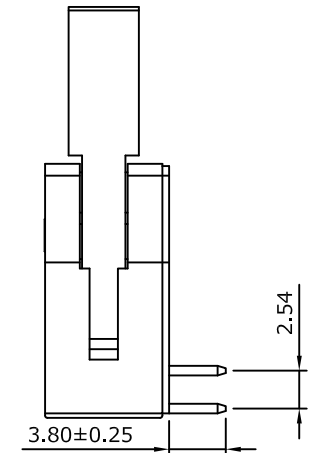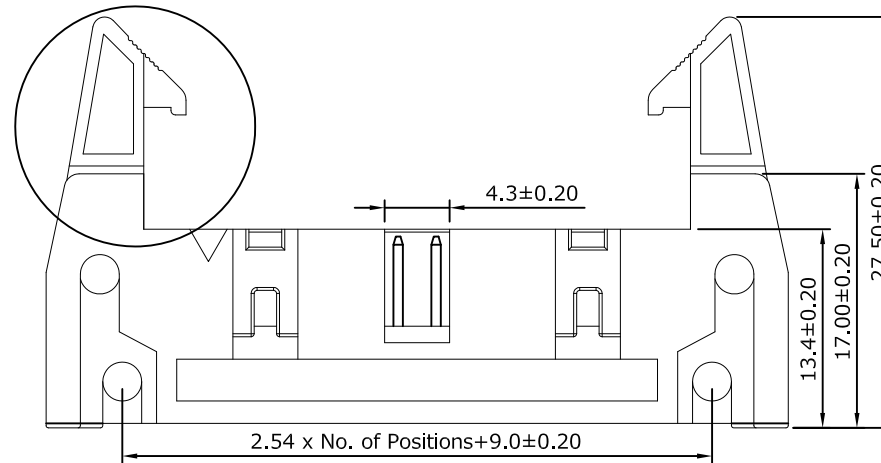

			<p>Morecrafts Tel: +886-2-2966-1326 Fax: +886-2-2966-1352</p>	PART NO.	GR25X1-XXX	DATE	2007/08/19		
				DRAWING NO.	GR25X1-XXX	DRAWN	Sayid		
				CUSTOMER P/N		APPROVED	Max		
REV.	DESCRIPTION	DATE	TITLE: Ejector Header 2.54mm	REV. A	TOLERANCE .X ±0.25 .XX ±0.20	SCALE	FREE	UNIT	mm